






SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

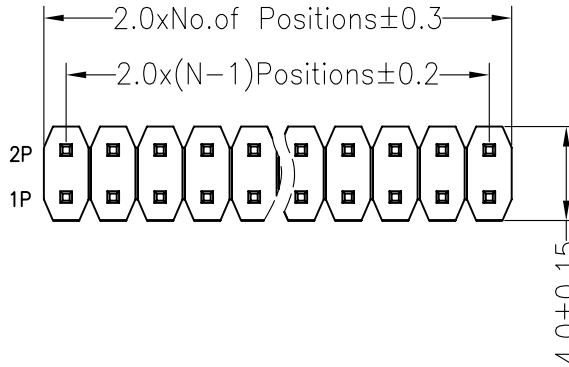

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

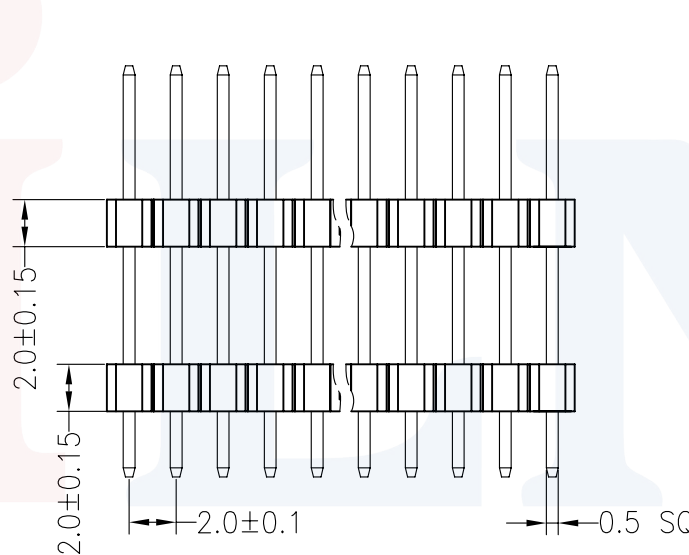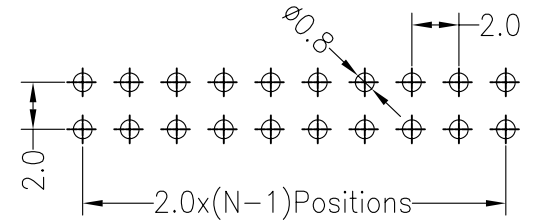

Ordering Information

1320 22 XX X N XX S XXX X 01

- No.of Pins Per Row: 1x40, 2x40, 3x40, 1--40, 2--80, 3--120
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube



Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	4.00	2.80	10.80
Alternate				

				OPERATION		DRAW		YiYuSheng		12.04.11		SCALE		FIT	
				X.X ±0.30								UNIT		mm	
				X.XX ±0.20		CHECK						SIZE		A4	
A0				2012.04.11		NEW DRAWING						SHEET		1/1	
REV				DATE		MODIFICATION DESCRIPTION		CHANGE				PROJ.			
				X.XXX ±0.10		APPROVE						PART NO.		132022XXXXXXSXXX01	
				Angle ±3°								TITLE:		2.0PH 2xNpin 2*H2.0mm 180°	
				DIM TOL											

JiLN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992