HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

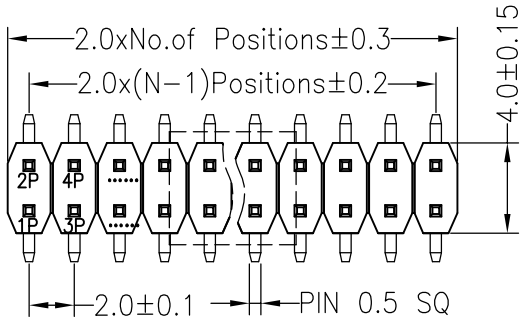

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

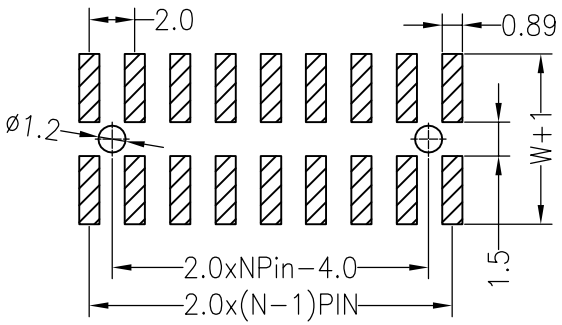

Ordering Information

1320 12 XX X X XX M XXX X 0X

- No.of Pins Per Row 1x40
- Insulator Material Option
  - A=BK−PBT
  - B=BK−PA66
  - C=BK−PA6T
  - D=BK−PA46
  - F=BK−LCP
- Contact Plating
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- Pin Length
- Packing
  - A=Tray
  - T=Tube
  - O=Pe
  - R=Tape&ReeL
  - P=Tube&ReeL

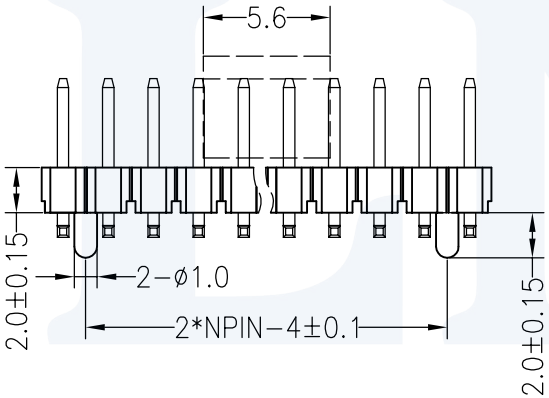

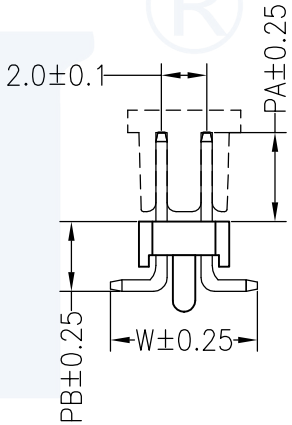

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	3.20	6.40	8.70

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.10.28	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	chengyigang	19.10.28
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	1320−12XXXXXXMXXX02
TITLE:	2.0PH 2xNpin H2.0MM SMT夹持盖