



SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 5 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

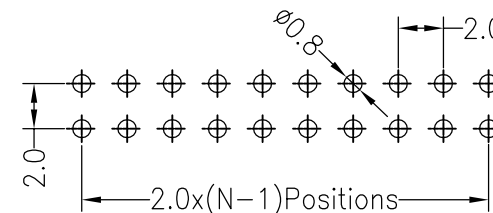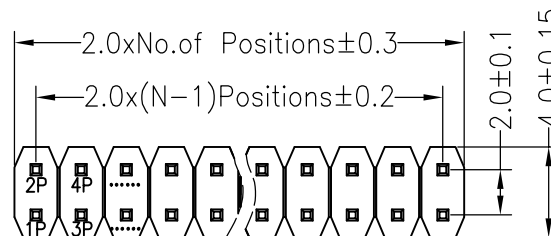

Ordering Information

1320 12 XX X N XX S XXX X 01



No.of
Pins
2x1~2x40

Insulator Material
Option
A=BK-PBT
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
A=Tray
T=Tube
O=Pe
R=Tape&Reel
P=Tube+Cap

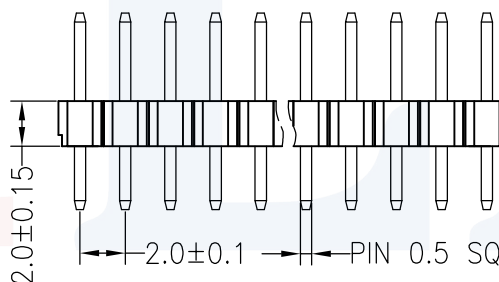

Dimension antitheses list

ITEM	PA	PC	L
Standard	3.90	2.80	8.70

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

DRAW

BEN

19.09.17

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

132012XXXNXXSXXXX01

TITLE:

2.0PH 2xNpin H2.0mm 180°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	BEN	19.09.17	SCALE	FIT	PART NO.	TITLE:
A0	2019.09.17	NEW DRAWING		X.X ±0.30	CHECK			UNIT mm		132012XXXNXXSXXXX01	2.0PH 2xNpin H2.0mm 180°
				X.XX ±0.20				SIZE A4			
				X.XXX ±0.10				SHEET 1/1			
				Angle ±3°	APPROVE			PROJ.			
				DIM TOL							