







SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5-10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

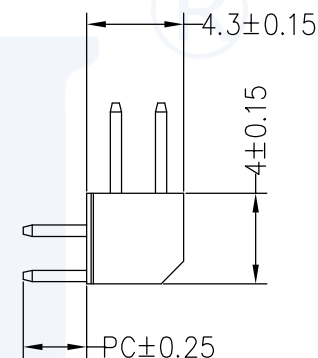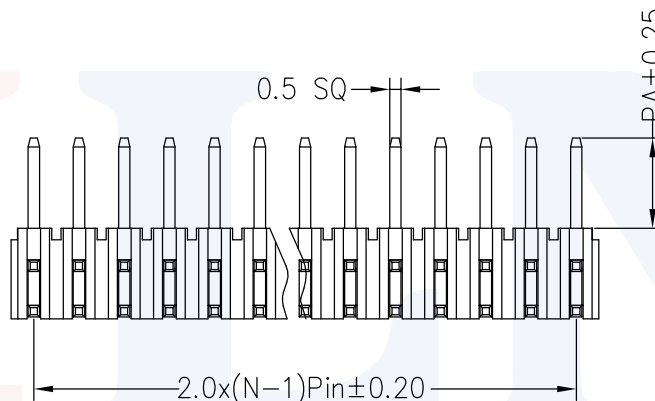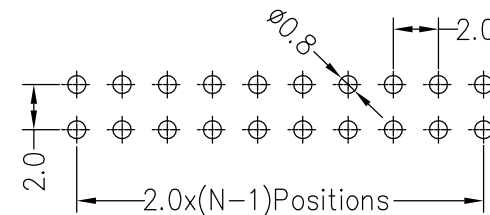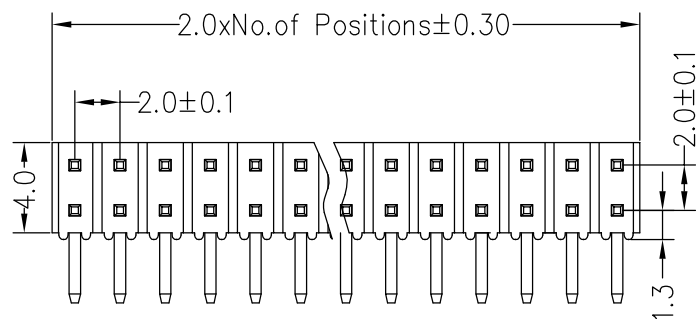

Ordering Information

1340 12 XX X N XX R XXX X01

- No.of Pins: 1x40, 2x40, 1--40, 2--80
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0: Gold Flash, G1: 3U" Gold, G2: 5U" Gold, G3: 10U" Gold, G4: 15U" Gold, G5: 30U" Gold, S0: Gold Flash/Tin, SN: Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.80	9.50/13.5
Alternate			

				OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT	JiLN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10		SHEET	1/1				
A0	2012.04.11	NEW DRAWING		Angle	±3°	APPROVE	PROJ.	◆	PART NO.	134012XXXXNXXRXXX01		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL		TITLE:	2.0PH 2xNpin H4.0mm 90°				