


	1	2	3	4	5	6	7	8	9																																										
G	HSF RoHS																																																		
F	SPECIFICATIONS Rated Current:1.0AMP Contact Resistance:35mΩ Max Withstand Voltage:500V AC/DC Insulation Resistance:500MΩ Min Operation Temperature:-40°C to +105°C Contact Material:Phosphor Bronze Contact Area Plated:Au or Sn Over Ni Shell Material:Zinc copper Insulator Material:PBT (UL94V-0) Black Max.Processing Temp: 180°C for 30-60 seconds (200°C for 10 seconds)						Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)																																												
E																																																			
D																																																			
C	Ordering Information 6331-M 020 S D XX MN T 01 No.of Pins 20P Contact Plating G4:3U" Gold S2:3U" Gold /Tin Packing A:Tray T:Tube																																																		
B							<table border="1"> <thead> <tr> <th>Pin No.</th><th>Specification</th><th>Material</th><th>Q'TY</th><th>UNIT</th></tr> </thead> <tbody> <tr> <td>①</td><td>胶芯(plastic)</td><td>PBT</td><td>PCS</td><td>1</td></tr> <tr> <td>②</td><td>端子(terminal)</td><td>C5191-EH</td><td>PCS</td><td>20</td></tr> <tr> <td>③</td><td>锌合金外壳(outside shell)</td><td>zinc</td><td>PCS</td><td>1</td></tr> </tbody> </table>			Pin No.	Specification	Material	Q'TY	UNIT	①	胶芯(plastic)	PBT	PCS	1	②	端子(terminal)	C5191-EH	PCS	20	③	锌合金外壳(outside shell)	zinc	PCS	1																						
Pin No.	Specification	Material	Q'TY	UNIT																																															
①	胶芯(plastic)	PBT	PCS	1																																															
②	端子(terminal)	C5191-EH	PCS	20																																															
③	锌合金外壳(outside shell)	zinc	PCS	1																																															
A	<table border="1"> <thead> <tr> <th>REV</th><th>DATE</th><th>MODIFICATION DESCRIPTION</th><th>CHANGE</th></tr> </thead> <tbody> <tr> <td>A</td><td>2020.09.26</td><td>NEW DRAWING</td><td></td></tr> </tbody> </table>			REV	DATE	MODIFICATION DESCRIPTION	CHANGE	A	2020.09.26	NEW DRAWING		<table border="1"> <thead> <tr> <th colspan="2">OPERATION</th><th rowspan="2">DRAW</th><th rowspan="2">YiYuSheng</th><th rowspan="2">20.09.26</th><th rowspan="2">SCALE</th><th rowspan="2">FIT</th></tr> <tr> <th>X.X</th><th>±0.30</th></tr> </thead> <tbody> <tr> <td>X.XX</td><td>±0.20</td><td>CHECK</td><td></td><td></td><td>UNIT</td><td>mm</td></tr> <tr> <td>X.XXX</td><td>±0.10</td><td rowspan="2">APPROVE</td><td rowspan="2"></td><td rowspan="2"></td><td>SIZE</td><td>A4</td></tr> <tr> <td>Angle</td><td>±3°</td><td>SHEET</td><td>1/1</td></tr> <tr> <td>DIM</td><td>TOL</td><td>PROJ.</td><td></td><td></td><td></td><td></td></tr> </tbody> </table>			OPERATION		DRAW	YiYuSheng	20.09.26	SCALE	FIT	X.X	±0.30	X.XX	±0.20	CHECK			UNIT	mm	X.XXX	±0.10	APPROVE			SIZE	A4	Angle	±3°	SHEET	1/1	DIM	TOL	PROJ.					JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE																																																
A	2020.09.26	NEW DRAWING																																																	
OPERATION		DRAW	YiYuSheng	20.09.26	SCALE	FIT																																													
X.X	±0.30																																																		
X.XX	±0.20	CHECK			UNIT	mm																																													
X.XXX	±0.10	APPROVE			SIZE	A4																																													
Angle	±3°				SHEET	1/1																																													
DIM	TOL	PROJ.																																																	
							<table border="1"> <tbody> <tr> <td>PART NO.</td><td colspan="5">6331-M020SDXXMNT01</td></tr> <tr> <td>TITLE:</td><td colspan="5">SM-PCR 20P male 180°</td></tr> </tbody> </table>			PART NO.	6331-M020SDXXMNT01					TITLE:	SM-PCR 20P male 180°																																		
PART NO.	6331-M020SDXXMNT01																																																		
TITLE:	SM-PCR 20P male 180°																																																		
	1	2	3	4	5	6	7	8	9																																										

Rated Current:1.0AMP
Contact Resistance:35mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:500MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material: Phosphor Bronze
Contact Area Plated: Au or Sn Over Ni
Shell Material: Zinc copper
Insulator Material: PBT (UL94V-0) Black
Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)





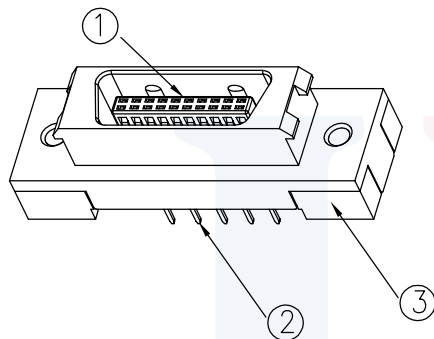


6331- M 020 S D XX M N T 01


No.of
Pins
20P

Contact Plating
G4:3U" Gold
S2:3U" Gold /Tin

Packing
A:Tray
T:Tube

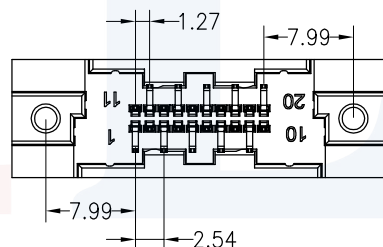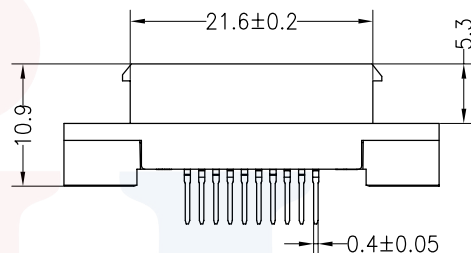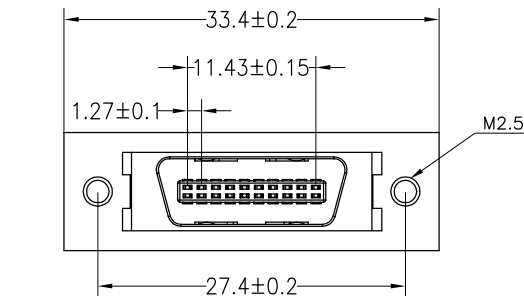

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

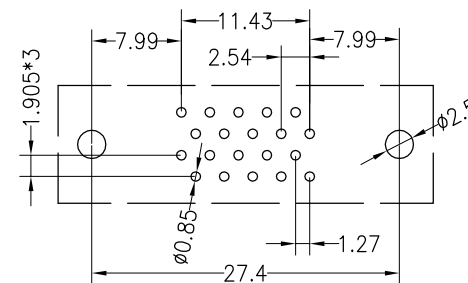

Pin No.	Specification	Material	Q'TY	UNIT
①	胶芯 (plastic)	PBT	PCS	1
②	端子 (terminal)	C5191-EH	PCS	20
③	锌合金外壳 (outside shell)	zinc	PCS	1

				OPERATION		DRAW	YiYuSheng	20.09.26	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				CHECK			
				X.XX	±0.20					SIZE		
				X.XXX	±0.10	APPROVE			SHEET	1/1	PART NO.	6331-M020SDXXMNT01
A	2020.09.26	NEW DRAWING		Angle	±3°							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.		TITLE:	SM-PCR 20P male 180°