

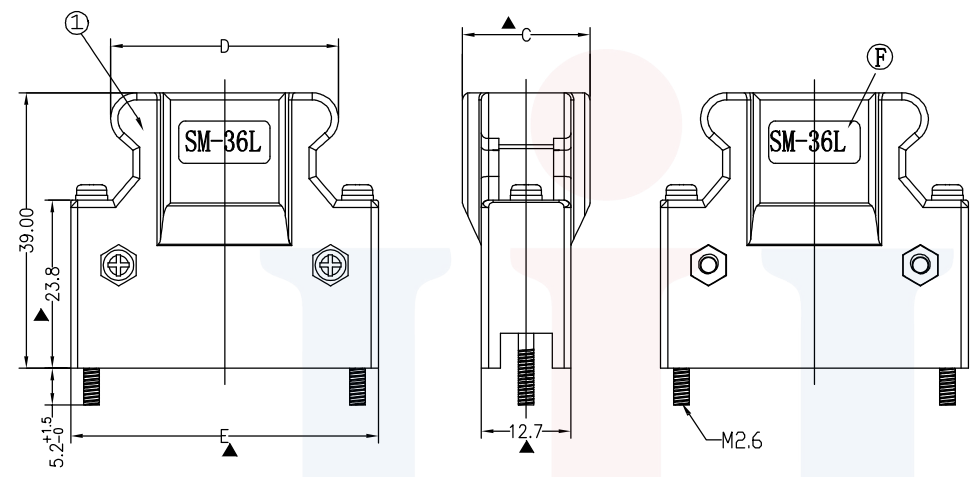


# HSF RoHS

外壳PIN数	DIM A	DIM B	DIM C	DIM D	DIM E	F处字体
14P	7.00	23.60	12.70	18.20	29.50	SM-14L
20P	10.00	27.40	14.00	22.05	33.35	SM-20L
26P	10.00	31.30	14.00	25.86	37.16	SM-26L
36P	10.00	37.61	18.00	32.21	43.51	SM-36L
	14.00					
50P	14.00	46.50	18.00	41.10	52.40	SM-50L

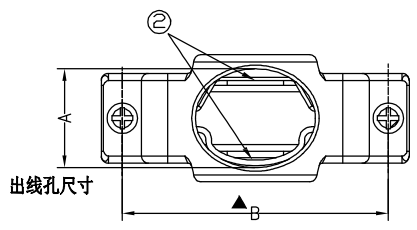

⑥	SHELL	1	SPCC	Gold PLATING Or Nickel
⑤	COVER	PINS	Copper Alloy	Gold PLATING Or Nickel
④	HOUSING	1	PBT	UL 94V-0
③	Cover	1	PBT	UL 94V-0
②	Clamp	2	Spcc	
①	Plastic shell	2	PBT	UL 94V-0
ITEM	PART NAME	Q'TY/EA	MATETIALS	NOTE

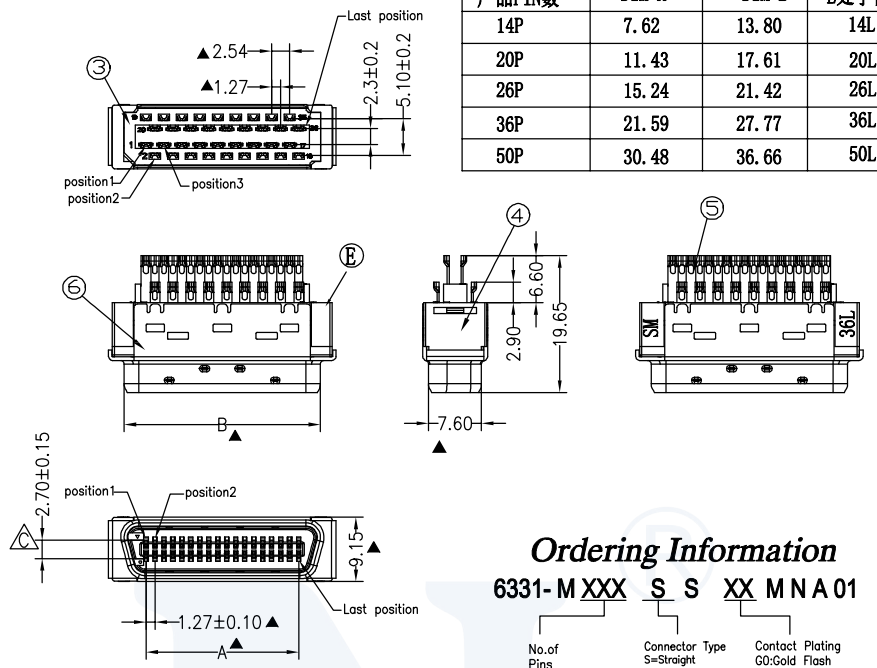

产品PIN数	DIM A	DIM B	E处字体
14P	7.62	13.80	14L
20P	11.43	17.61	20L
26P	15.24	21.42	26L
36P	21.59	27.77	36L
50P	30.48	36.66	50L

**Ordering Information**  
**6331-MXXX S S XX MNA 01**

No. of Pins 14,20P,26P,36P 50P	Connector Type S=Straight	Contact Plating C0:Gold Flash G1:30u" Gold S0:Gold Flash/Tin S1:30u" Gold /Tin S2:50u" Gold /Tin S3:100u" Gold /Tin S4:150u" Gold /Tin S5:300u" Gold /Tin
--------------------------------------	------------------------------	---

- Specification:**
- Contact Resistance: 35 m Ohm Max.
  - Insulation Resistance: 200 M Ohm Min. At 500V DC.
  - Contact Current Rating: 1 Amp AC/DC
  - Voltage Rating: 40V AC.
  - Withstanding Voltage: 500V AC For 1 Minute.
  - Operating Temperature: -25°C to +85°C
  - Wire Accomodation: 24,26,28 & 30 AWG
  - Control Dimensions Indicated From "▲".

- Material and Finish:**
- Insulator Material: Glass Reinforced Polyester(PBT) UL94-V0,Black
  - Contact Material: Phosphor Bronze(C5191-EH)T=0.30
  - Shroud Material: Spcc
  - Contact Area Plated: Gold-Plated Over Nickel 50u"
  - Solder Area Plated: Tin Plated(80u" min Lead Free)

OPERATION		DRAW	YiYuSheng	17.06.21	SCALE	FIT	<b>JILN® 深圳市锦凌电子有限公司</b> <b>SHENZHEN JINLING ELECTRONIC CO.,LTD</b> Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
X.X	±0.30							
C	2017.06.21	新增尺寸管控			UNIT	mm	PART NO.	6331MXXXSSXXMNA01
B	2014.02.21	更改出线孔尺寸			SIZE	A4		
A	2012.04.18	NEW DRAWING			SHEET	1/1	TITLE:	SCSI SM Solder type Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		PROJ.			