

HSF RoHS

SPECIFICATIONS

Electical Rating:AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt:200V AC/minute
 Opratng Temperature:-40°to+125°

Contact Material:Phosphor Bronze
 Contact:Au Over Ni
 Insulator Material:PA9T(UL94V-0)

Ass'y High(H)	Plastic High	
	Male(H1)	Female(H2)
6.50	2.00	4.50
6.00	2.00	4.00
5.50	1.00	4.50
5.00	1.00	4.00
4.50	1.00	3.50
4.00	1.00	3.00

Ordering Information

3713 M XXX XXX XX X X 01

F=Female
 M=Male





No.of pins
 8P,10P,12P,14P,
 16P,18P,20P,22P,
 24P,26P,28P,30P,
 32P,34P,36P,38P,
 40P,42P,44P,46P,
 48P,50P,60P,
 80P,100P

Plastic Hight
 010=1.0mm
 020=2.0mm

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 S3:3u"Gold Flash/Tin

Insulator Material
 Option
 C=BK-PA9T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

Packing
 T:Tube
 R:Reel

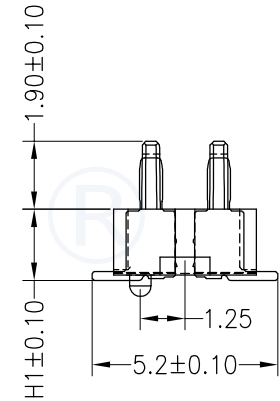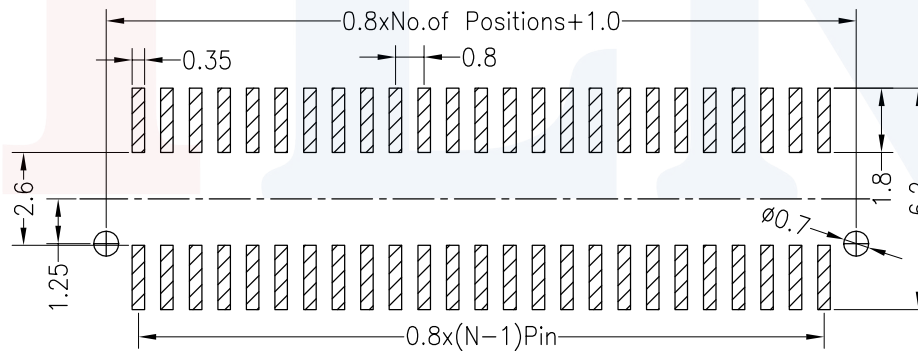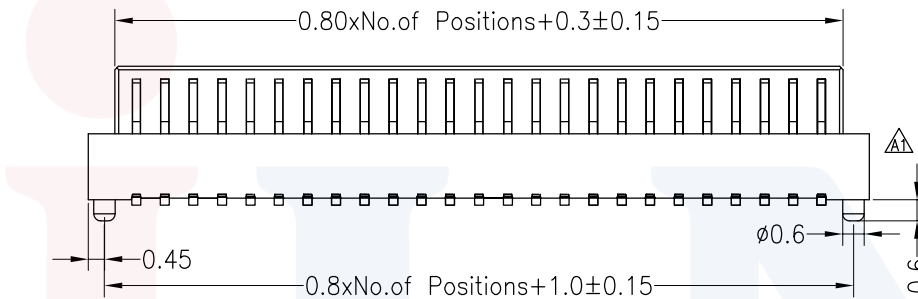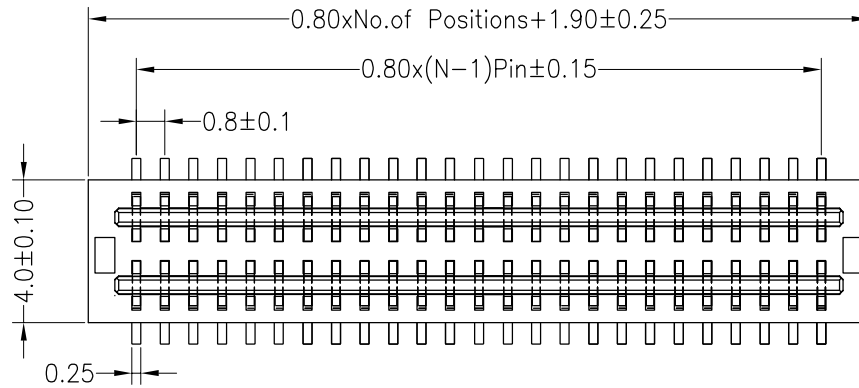

Recommended P.C.B Layout(Top Side)

OPERATION		DRAW	yiyusheng	19.09.07	SCALE	FIT	
X.X	±0.30						
X.XX	±0.20	CHECK			UNIT	mm	
X.XXX	±0.10						
Angle	±3°	APPROVE			SIZE	A4	
DIM	TOL						
		SHEET			1/1	PART NO.	3713MXXXXXXXXX01

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2019.09.07	取消凸台	
A0	2014.10.27	NEW DRAWING	