

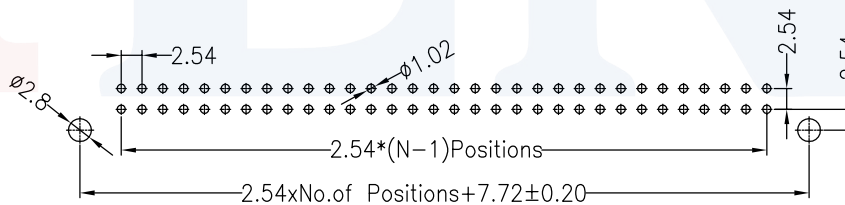
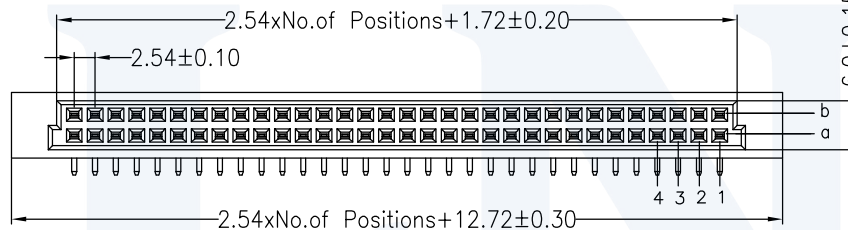



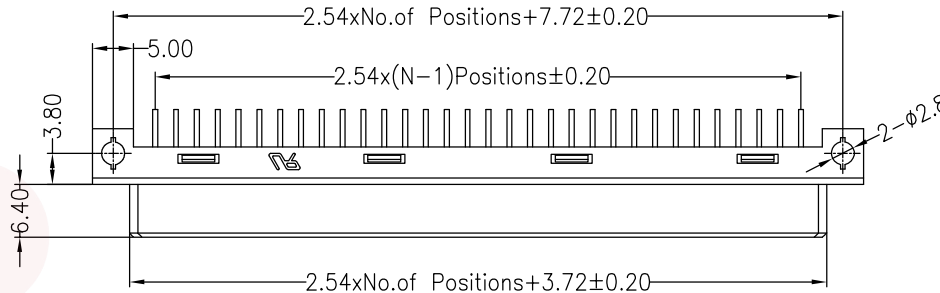

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

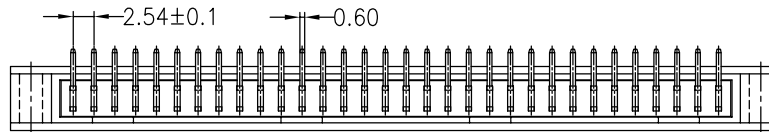

Ordering Information

35112 XX B F R XX BNAX

No.of Pins
 10, 12, 16
 20, 32, 44
 48, 64

Contact Type
 F=Female

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT	JILN® 深圳市锦凌电子有限公司	
				X.X	±0.30						SHENZHEN JINLING ELECTRONIC CO.,LTD	
B	2014.09.16	增加UL标识		X.XX	±0.20	CHECK			UNIT	mm	Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
A0	2014.04.11	NEW DRAWING		X.XXX	±0.10	APPROVE			SIZE	A4	PART NO.	35112XXBFRXXBNAX
				Angle	±3°				SHEET	1/1	TITLE:	欧式插座 母座 90度 2xNP 成品系列图
				DIM	TOL				PROJ.	◆		