

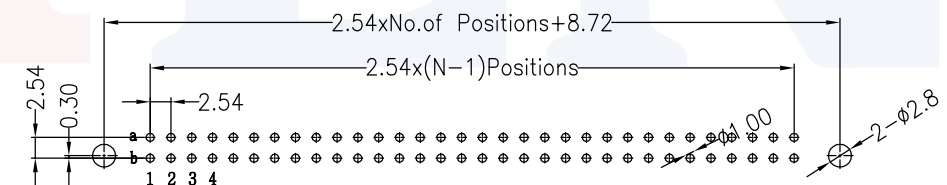
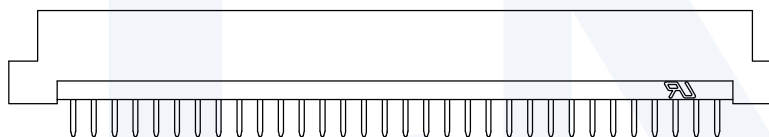


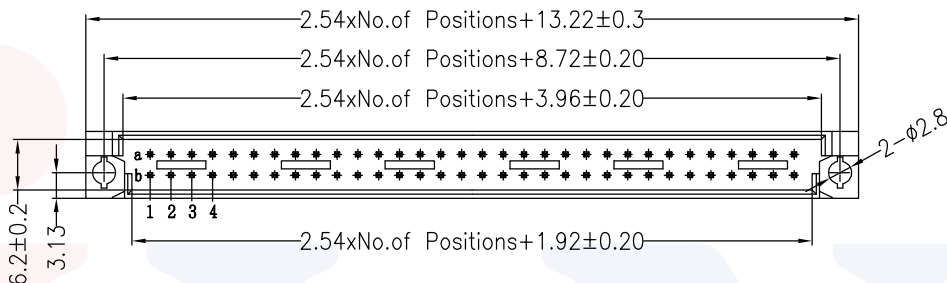

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

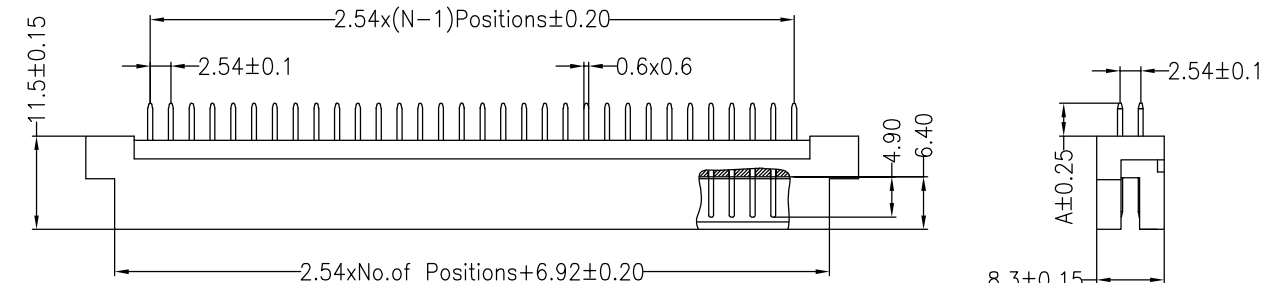

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

Ordering Information

35112 XX B M S XX B N A X

No. of Pins
 10, 16, 20
 32, 44, 48
 64

Contact Type
 M=Male

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT
				X.X	±0.30					
B	2014.09.16	增加UL标识		X.XX	±0.20	CHECK			UNIT	mm
A0	2012.04.10	NEW DRAWING		X.XXX	±0.10	APPROVE			SIZE	A4
				Angle	±3°				SHEET	1/1
				DIM	TOL				PROJ.	☉

PART NO. 35112XXBMSXXBNAX
 TITLE: 欧式插座 公座 180度 2xNPN 成品系列图