





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

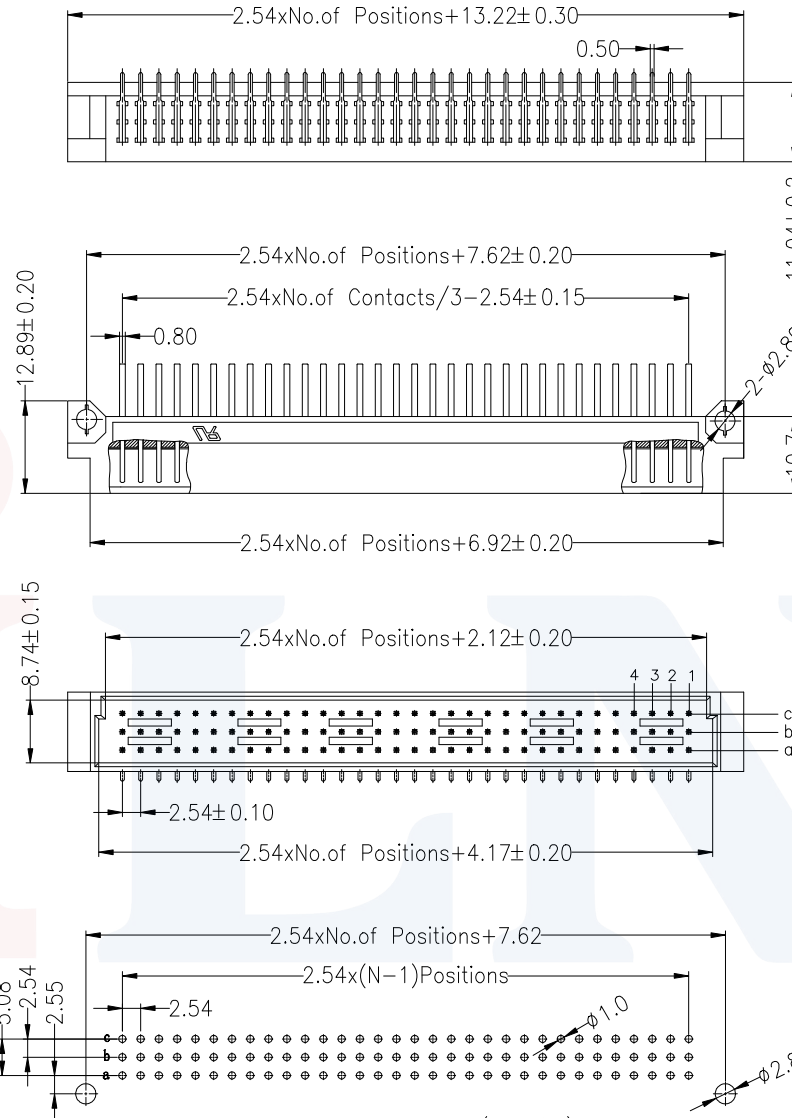

Ordering Information

35113 XX A M R XX B N A X

No.of Pins
21, 30, 48
96

Contact Type
M=male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	3.00

A					OPERATION	DRAW	YiYuSheng	14.09.16	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	PART NO.	35113XXAMRXXBNAX
	B	2014.09.16	增加UL标识		X.X	±0.30	CHECK		UNIT	mm			
	A0	2012.04.10	NEW DRAWING		X.XX	±0.20			SIZE	A4			
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	X.XXX	±0.10	APPROVE		SHEET	1/1			
					Angle	±3°			PROJ.	☉			
				DIM	TOL			TITLE:	欧式插座 公座 90度 3xNP 成品系列图				