

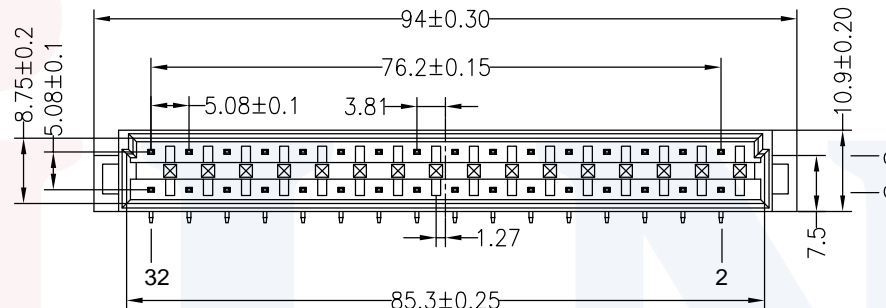



HSF RoHS

SPECIFICATIONS

Rated Current:6.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

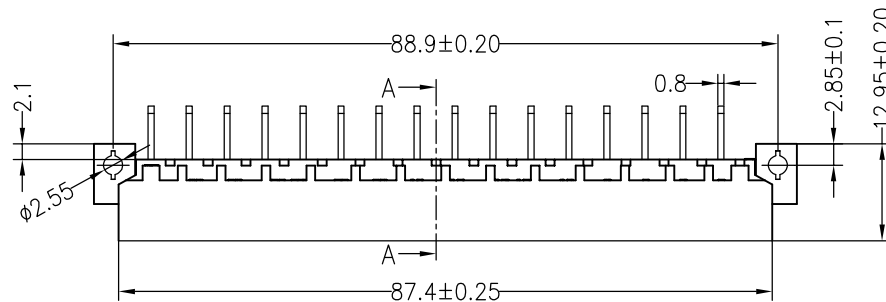


Ordering Information

3513 2 32 A M R XX BNA1

No. of Pins
32PIN

Contact Type
M=Male

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin

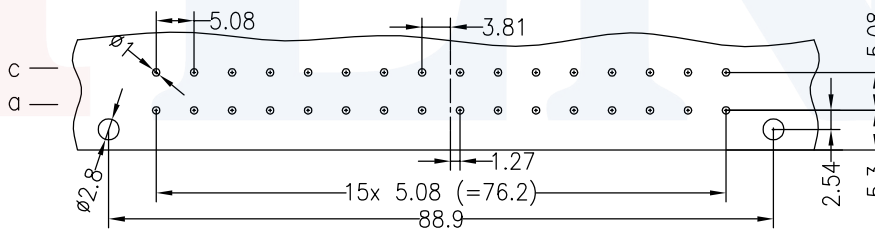

PCB LAYOUT(RECOMMENDED)

OPERATION		DRAW	YiYuSheng	17.05.15
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2017.05.15	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 3513232AMRXXBNA1
 TITLE: 欧式插座 5.08 高电流 弯公
 DIN41612 5.08mm high current
 right angle male