
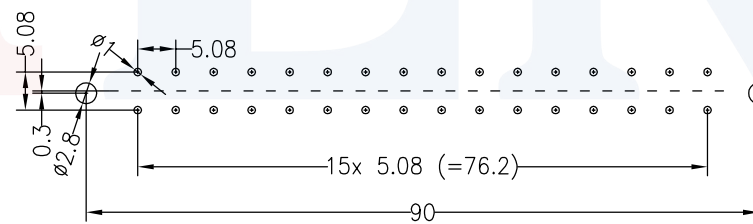

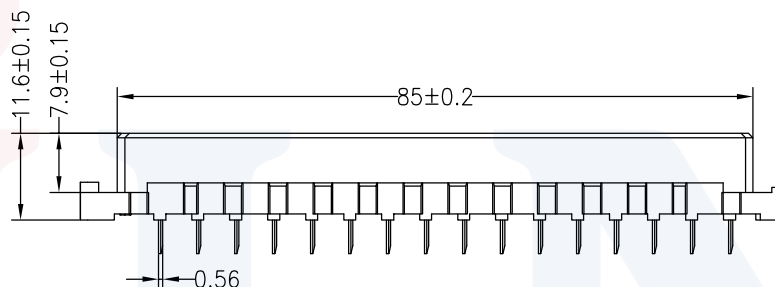


HSF RoHS

SPECIFICATIONS

Rated Current:6.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

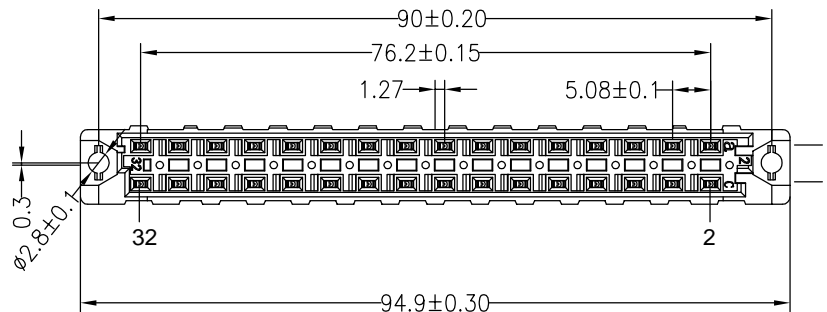

PCB LAYOUT(RECOMMENDED)

Ordering Information

3513 2 32 A F S XX BNA1

- No. of Pins
32PIN
- Contact Type
F=Female
- Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

				OPERATION		DRAW	YiYuSheng	17.03.24	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			3513232AFSXXBNA1
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			欧式插座 5.08 高电流 直母 DIN41612 5.08mm high current straight female
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL								