

HSF RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:500MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA9T




Max.Processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

Ordering Information


4400- 2 20 M G1 F E B W 02

No.of
Pins
2x23P

Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:2U" Gold
G3:3U" Gold
G4:5U" Gold
G5:10U" Gold

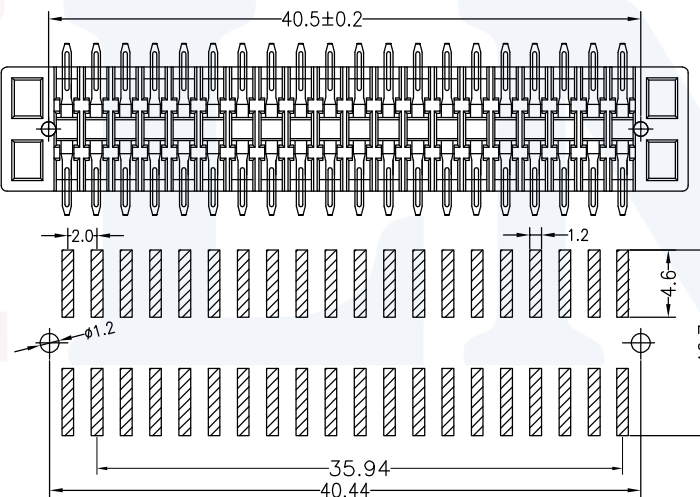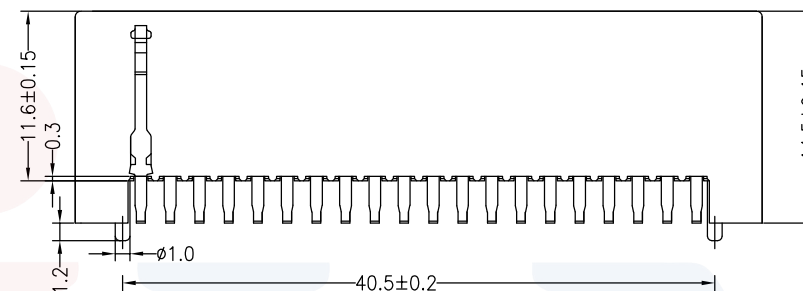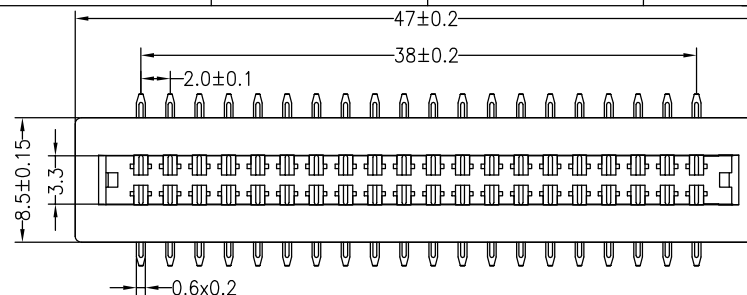

Recommended P.C.B Layout



OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

OuYangHui

17.11.03

CHECK

APPROVE

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

mm

A4

1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

4400-220MG1FEBW02

TITLE:

2.0金手指连接器 2X20P 母座H14.5 SMT 带柱

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9