
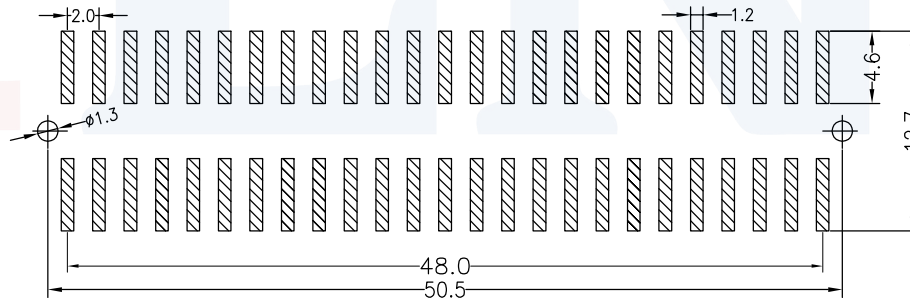
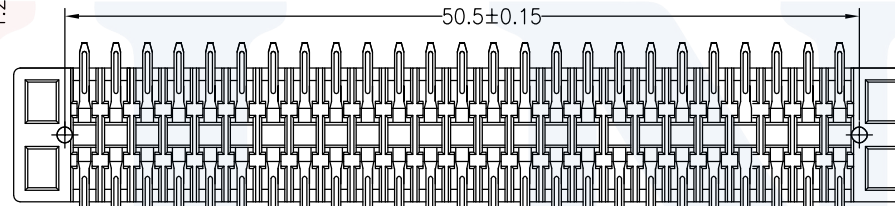

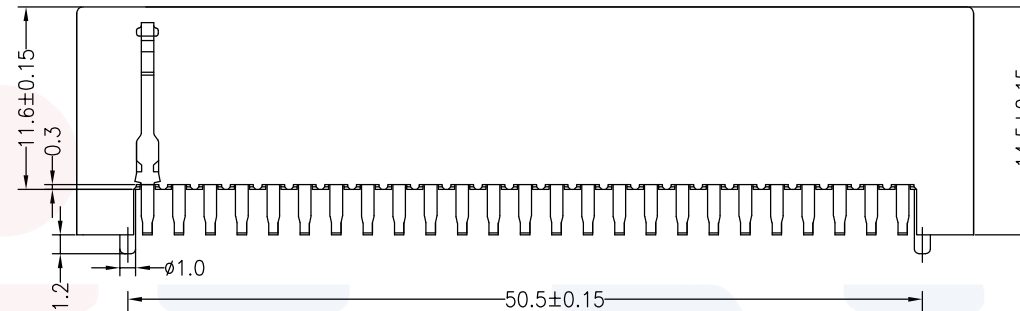


HSF RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA9T
 Max.Processing Temp: 230°C for 30-60 seconds
 260°C for 10 seconds

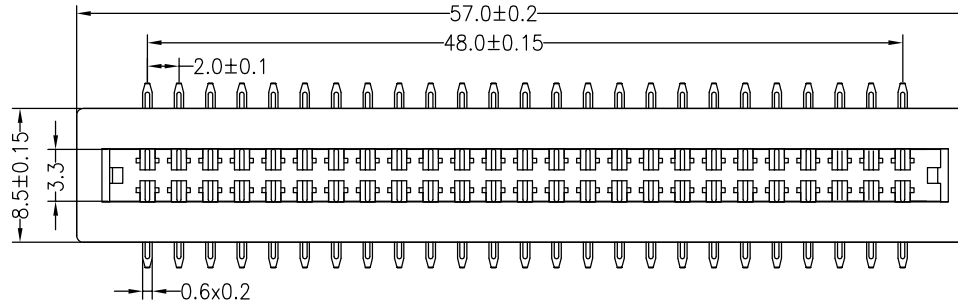

Recommended P.C.B Layout

Ordering Information

4400- 2 25 M G1 F E B W 01

No.of Pins
2x25P

Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:2U" Gold
 G3:3U" Gold
 G4:5U" Gold
 G5:10U" Gold

OPERATION		DRAW	欧阳辉	17.09.19	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
		SHEET			1/1	PART NO.
		PROJ.			客户:	4400-225MG1FEBW01

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

OPERATION	DRAW	欧阳辉	17.09.19	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20					
X.XXX ±0.10	APPROVE			SIZE	A4
Angle ±3°					
DIM TOL	SHEET			1/1	PART NO.
	PROJ.			客户:	4400-225MG1FEBW01

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	TITLE:		2.0金手指连接器 2X25P 母座 SMT 带柱
A	2017.09.19	NEW DRAWING		客户:		