

HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Phosphor bronze

Contact Plating:Au or Sn Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA9T



Max.Processing Temp: 230°C for 30-60 seconds
260°C for 10 seconds

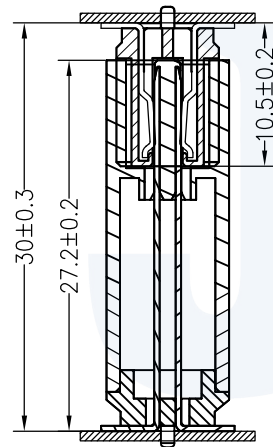


Mating Draw (Ref)

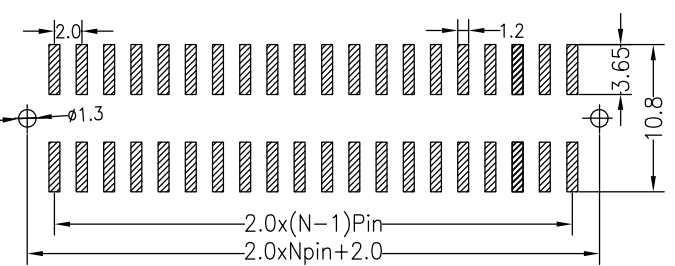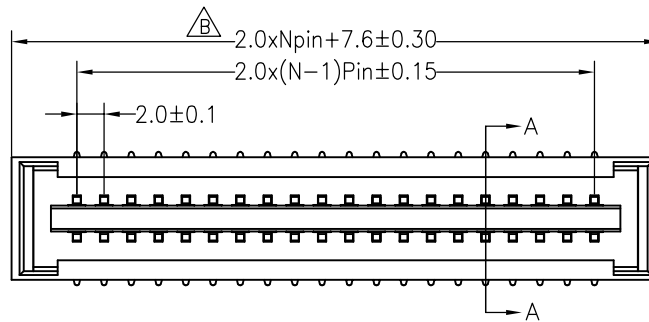

Recommended P.C.B Layout

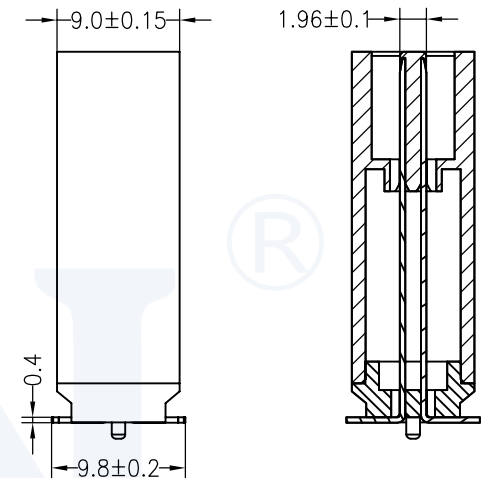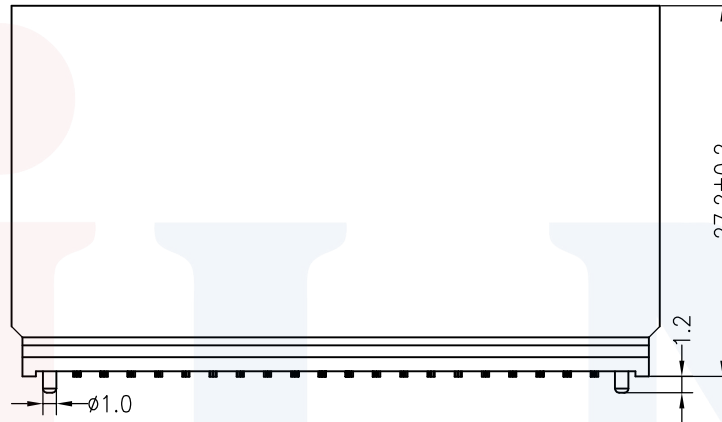

A-A SECTION

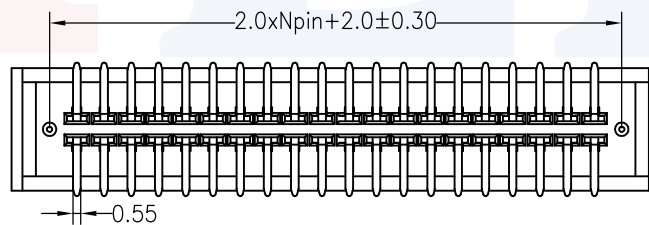

Ordering Information

4410- 2 XX M G1 M E B W 04

No.of
Pins
2x20P
2x25P
2x27P
2x32P

Contact Plating
G0:Gold Flash
G1:1U" Gold
G2:2U" Gold
G3:3U" Gold
G4:5U" Gold
G5:10U" Gold

OPERATION

DRAW

yiyusheng

20.03.19

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

4410-2XXMG1MEBW04

TITLE:

2.0加强型金手指连接器 公座 2xNpin H27.2 SMT 带柱

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

B

A

REV

2020.03.19

长度两边各加胶0.8

2019.07.09

NEW DRAWING

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9