

HSF RoHS


SPECIFICATIONS PERFORMANCE

Electical Rating:AC/DC 50V 0.5A
 Insulation Resistance: 500M Ω Min
 Contact Resistance:50m Ω Max
 Withstang Volt:150V AC/minute
 Opratng Temperature:-40°C to +105°C
 Material
 Contact:Phosphor Bronze Gold-Plated
 Housing:LCP UL94V0
 Max.Processing Temp:230°C for30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3720 F **XX** 018 **XX** **X** **X** **0X**

No.of Pins 60P 100P	Plastics Height H=1.8mm	Contact Plating G0:Gold Flash G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:30U" Gold S0:Gold Flash/Tin	Insulator Material Option D=BK-PA46 E=BK-PA9T F=BK-LCP	Packing A=Tray T=Tube R=Reel	code stream 01~99
---------------------------	----------------------------	----------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------	---------------------------------------	----------------------

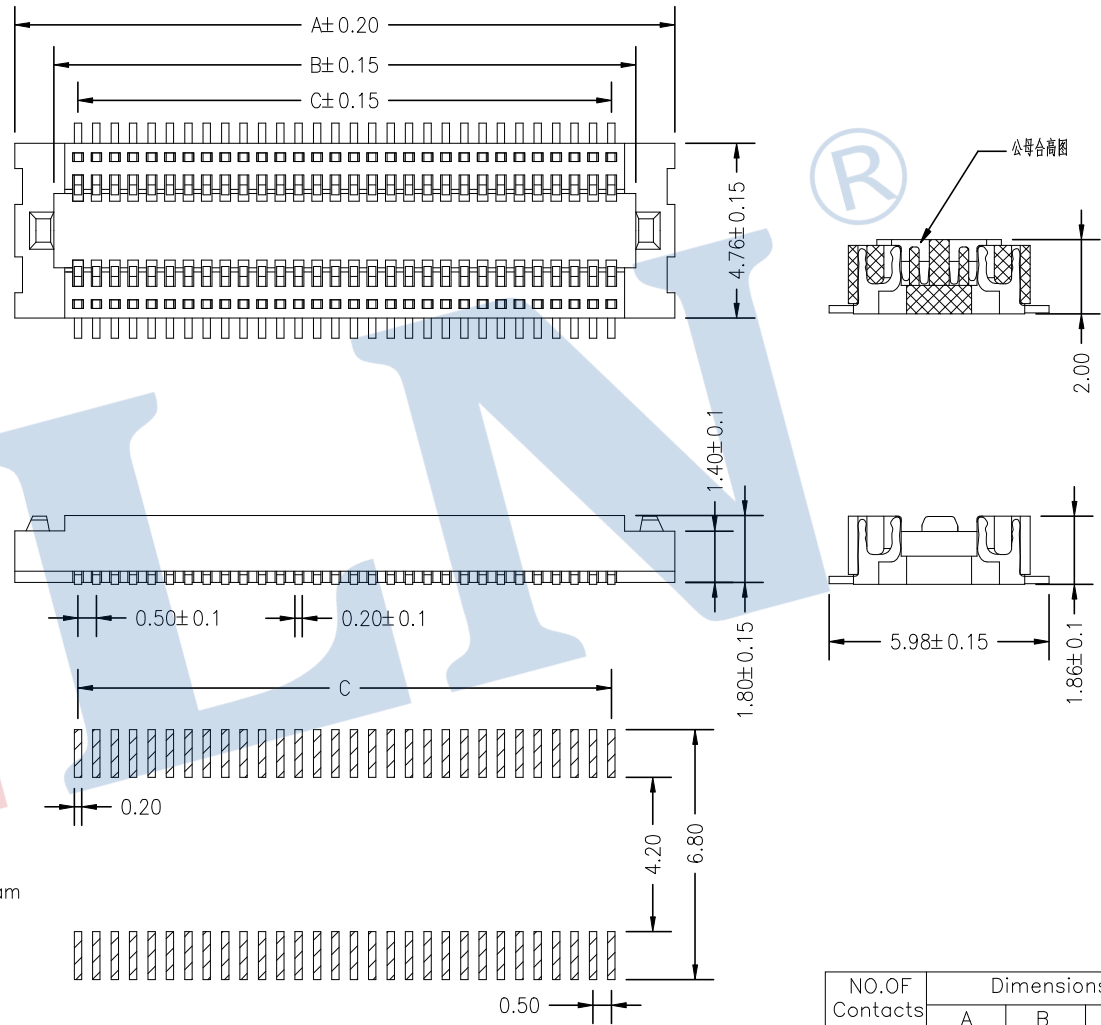

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NO.OF Contacts	Dimensions		
	A	B	C
100pin	28.14	26.02	24.50
60pin	18.14	16.02	14.50

				OPERATION		DRAW	Jelly Feng	22.06.30	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 3720FXX018XXXX0X		
				X.XXX	±0.10		SHEET	1/1				
A0	2022.06.30	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	TITLE:	0.5BTB-NPIN H=1.8 Female	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							