

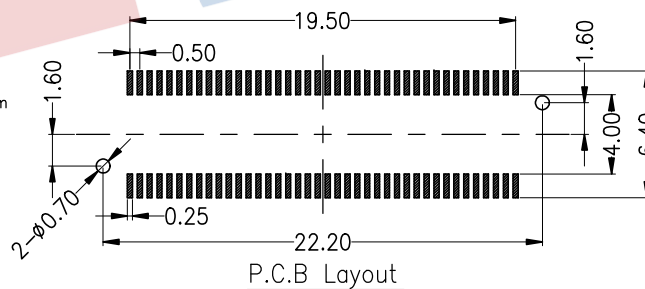
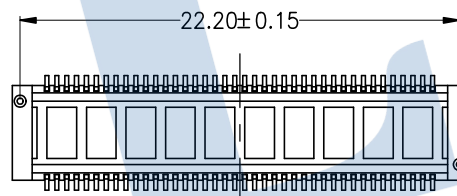


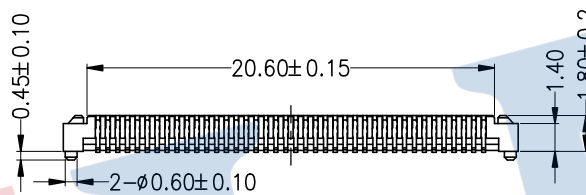


HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ Min
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°C to +125°C

Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

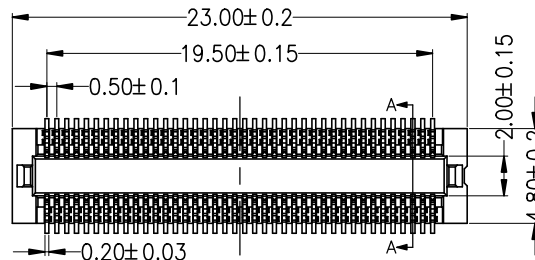

Ordering Information

3720 F 080 018 XX F X 0X

F=Female
 M=Male

No.of pins
 80P

Plastic Hight
 018=1.85mm

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 S0:1.5U" Gold/Tin
 S1:3U" Gold/Tin

Insulator Material Option
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

Packing
 T:Tube
 R:Reel

code stream
 01~99

				OPERATION		DRAW	Jelly Feng	2022.06.30	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30							
				X.XX	±0.20	APPROVE				SIZE	A4	
				X.XXX	±0.10					PROJ.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	TITLE:		PART NO.				
										P型 0.5mm BTB 80Pin H1.85 Female		