
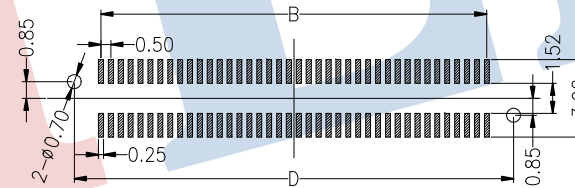

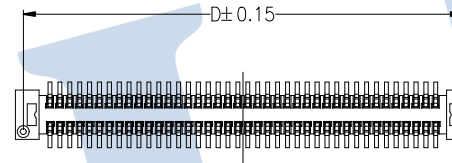
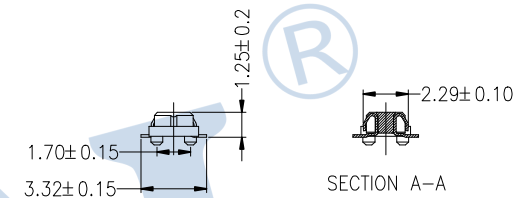
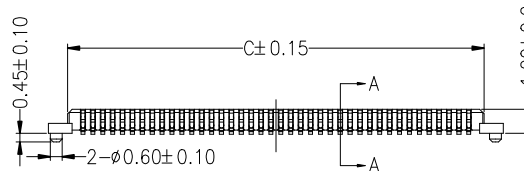


HSF RoHS

SPECIFICATIONS
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°C to +125°C
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max.Processing Temp: 260°C±5°C 5S

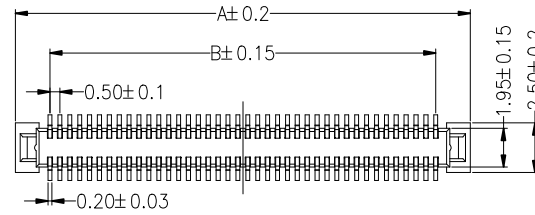

P.C.B Layout

Ordering Information

3720 M XXX 012 XX X X 0X

F=Female
M=Male

No. of pins
NPin
N=80

Plastic Hight
012=1.23mm

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
S0: 1.5U" Gold/Tin
S1: 3U" Gold/Tin

Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Packing code stream
T: Tube
R: Reel
01~99

Dimension Table				
No Of Pins	Dim A	Dim B	Dim C	Dim D
80	23.00	19.50	21.05	22.20

				OPERATION		DRAW	Jelly Feng	2023.06.30	SCALE	FIT
				X.X	±0.30					
				X.XX	±0.20	CHECK			SIZE	A4
				X.XXX	±0.10				SHEET	1/1
A0	2022.06.30	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3720MXXX012XXXXX0X
 TITLE: P型 0.5mm BTB NPin H1.23 Male