






HSF RoHS

SPECIFICATIONS
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ Min
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°C to +125°C

Material


Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max.Processing Temp: 260°C±5°C 5S

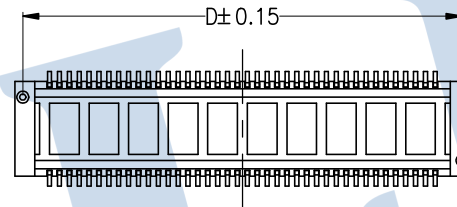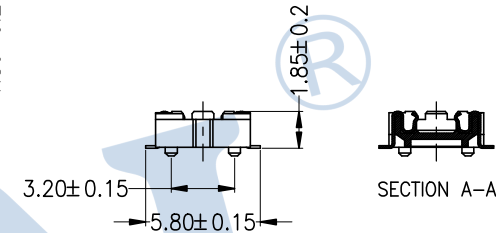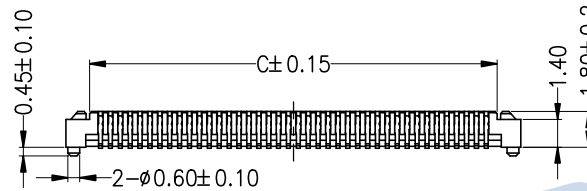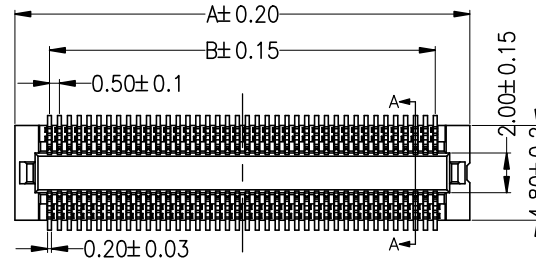

Ordering Information

3720 F XXX 018 XX X X 0X

- F=Female
M=Male
- No.of pins
80P
- Plastic Hight
018=1.85mm
- Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin
- Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP
- Packing
T:Tube
R:Reel
- code stream
01~99

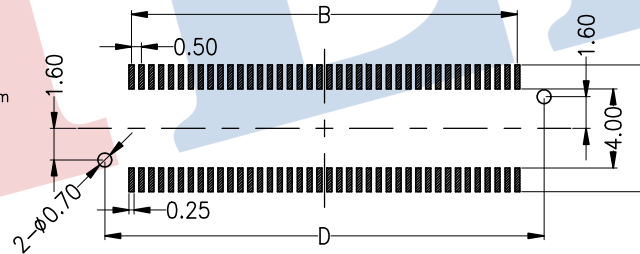

P.C.B Layout

Dimension Table				
No Of Pins	Dim A	Dim B	Dim C	Dim D
80	23.00	19.50	20.60	22.20

A0	2022.06.30	NEW DRAWING	CHANGE	OPERATION		DRAW	Jelly Feng	2023.06.30	SCALE	FIT
				X.X	±0.30				UNIT	mm
REV <td>DATE <td>MODIFICATION DESCRIPTION <td></td> <td>X.XX <td>±0.20 <td>CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td></td></td></td></td></td>	DATE <td>MODIFICATION DESCRIPTION <td></td> <td>X.XX <td>±0.20 <td>CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td></td></td></td></td>	MODIFICATION DESCRIPTION <td></td> <td>X.XX <td>±0.20 <td>CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td></td></td></td>		X.XX <td>±0.20 <td>CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td></td></td>	±0.20 <td>CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td></td>	CHECK <td></td> <td></td> <td>SIZE <td>A4</td> </td>			SIZE <td>A4</td>	A4
				X.XXX <td>±0.10 <td></td> <td></td> <td></td> <td>SHEET <td>1/1</td> </td></td>	±0.10 <td></td> <td></td> <td></td> <td>SHEET <td>1/1</td> </td>				SHEET <td>1/1</td>	1/1
				Angle <td>±3° <td>APPROVE <td></td> <td></td> <td>PROJ. <td></td> </td></td></td>	±3° <td>APPROVE <td></td> <td></td> <td>PROJ. <td></td> </td></td>	APPROVE <td></td> <td></td> <td>PROJ. <td></td> </td>			PROJ. <td></td>	
				DIM <td>TOL <td></td> <td></td> <td></td> <td></td> <td></td> </td>	TOL <td></td> <td></td> <td></td> <td></td> <td></td>					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3720FXXX018XXXX0X
 TITLE: P型 0.5mm BTB NPin H1.85 Female