

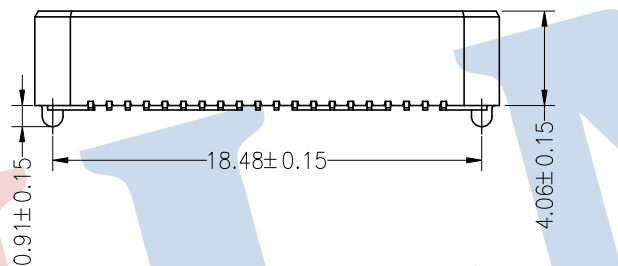



HSF RoHS

SPECIFICATIONS
PERFORMANCE

Signal Current Rating:2A/1PIN
 Ground Plane Powered Current Rating:
 25A/1Ground Plane Powered
 Voltage Rating:125V AC
 Insulation Resistance: 500MΩ Min
 Contact Resistance: 50mΩ Max
 Withstang Volt:500V AC/minute
 Opratng Temperature:-55°C to +125°C
Material
 Contact:Phosphor Bronze Gold-Plated
 Housing:LCP
 Max.Processing Temp: 260°C±5°C 5S

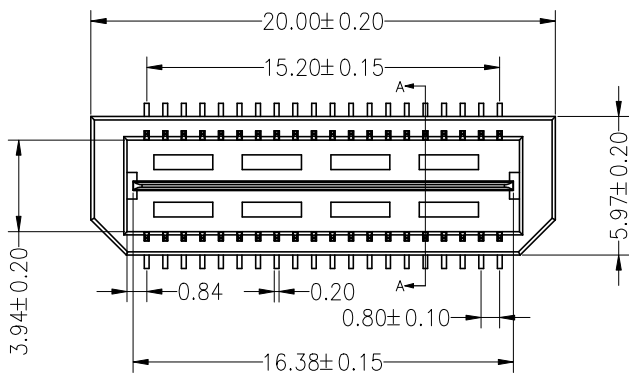

Ordering Information

3728 F 040 040 XX X X OX

M=Male
F=Female

No.of pins
NPin
N=40



Plastic Hight
040=4.06mm

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin

Insulator
Material
Option
F=BK-LCP

Packing
T:Tube
R:Reel

Stream Code
01~99

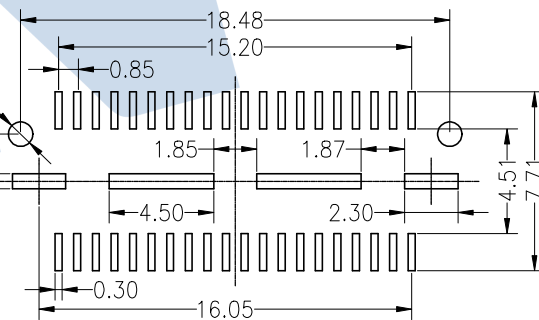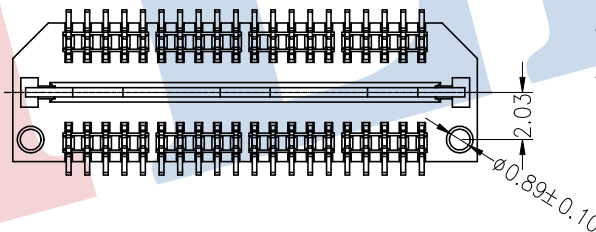

P.C.B Layout

				OPERATION		DRAW	Jelly Feng	2023.03.11	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 3728F040040XXXX0X TITLE: 0.8mm High-Speed BTB 40Pin H4.06 Female		
				X.XXX	±0.10		SHEET	1/1				
A0	2023.03.11	NEW DRAWING		Angle	±3°	APPROVE		PROJ.				
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							

A

A

1 2 3 4 5 6 7 8 9