



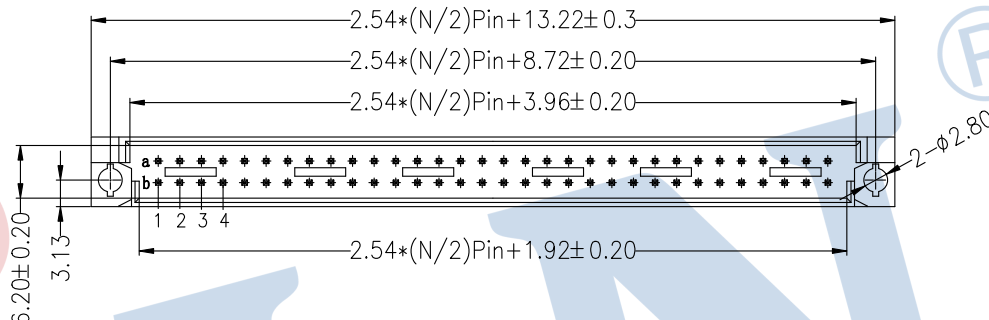

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

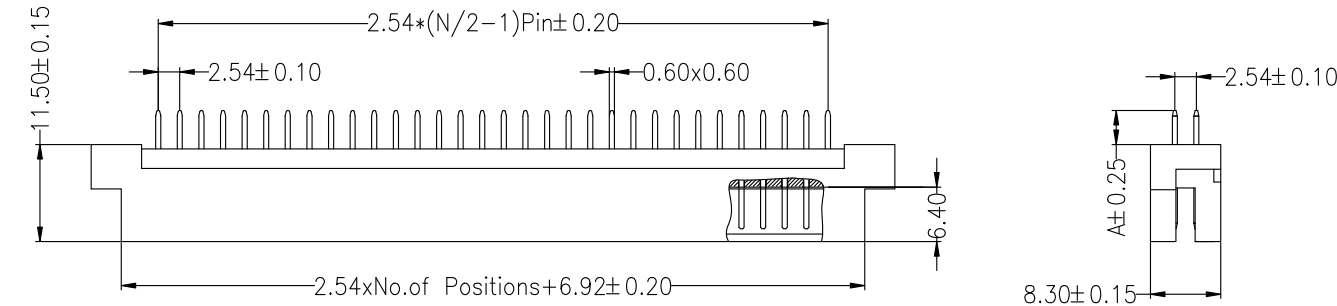

Ordering Information

3511 2 XX B M S XX B N A X

No. of Pins: 10, 16, 20, 32, 44, 48, 64
 Contact Type: M=Male
 Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin
 Stream Code

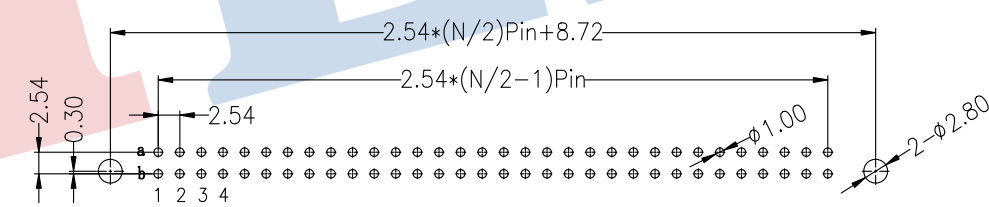

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

				OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30							
B	2014.09.16	增加UL标识		X.XX	±0.20	APPROVE			SIZE	A4	PART NO.	35112XXBMSXXBNAX
A0	2012.04.10	NEW DRAWING		X.XXX	±0.10				APPROVE			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.				TITLE:	欧式插座 公座 180度 2xNPIN 成品系列图