



SPECIFICATIONS





Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

Ordering Information

3511 2 XX B M S XX B W A X

No. of Pins NPin N=10, 16, 20, 32, 44, 48, 64	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
--	------------------------	---	-------------

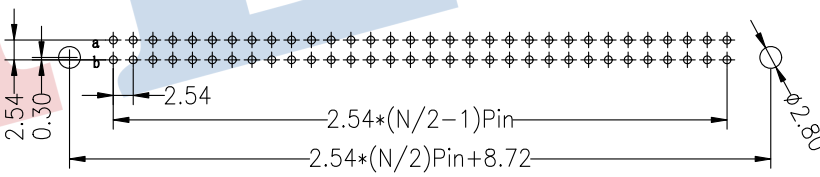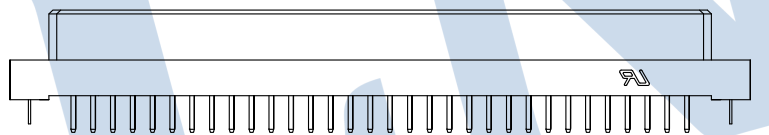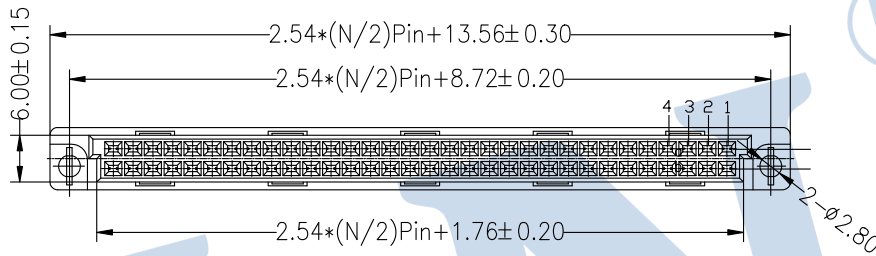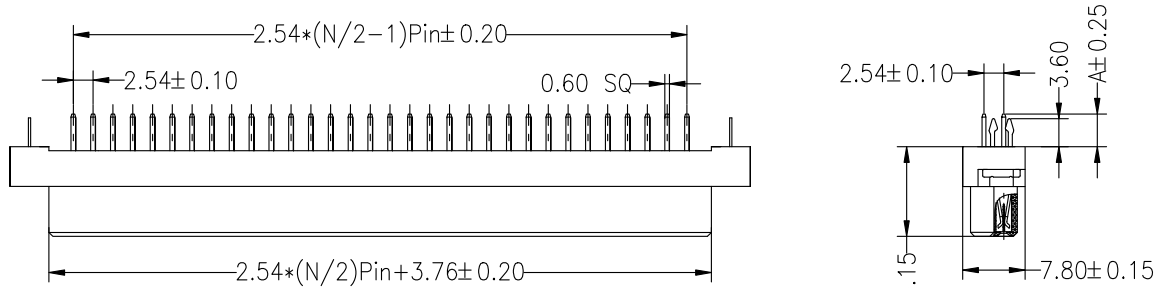

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

				OPERATION		DRAW		YiYuSheng		15.04.06		SCALE		FIT		JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588 PART NO. 35112XXBFSXXBWAX TITLE: 欧式插座 公座 180度 2xNPIN 带鱼叉成品系列图	
				X.X		±0.30		CHECK				UNIT		mm			
				X.XX		±0.20		APPROVE				SIZE		A4			
A0				2015.04.06		NEW DRAWING						SHEET		1/1			
REV				DATE		MODIFICATION DESCRIPTION		CHANGE				PROJ.		∅			
1		2		3		4		5		6		7		8		9	