

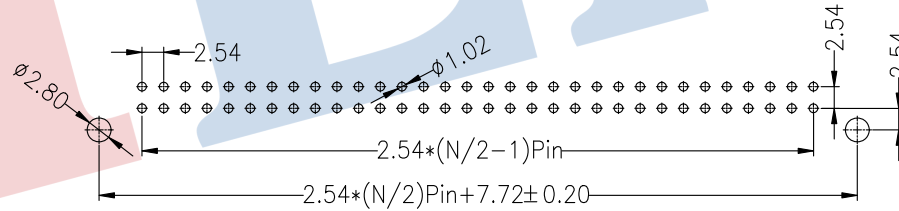
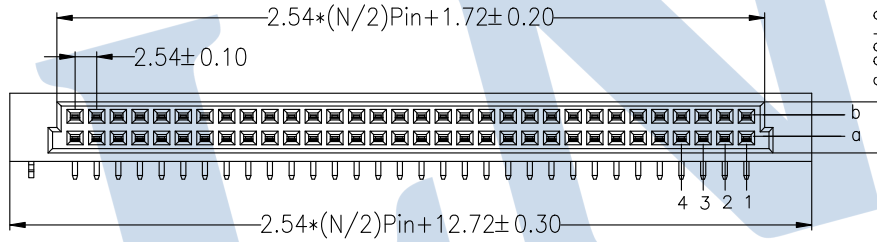



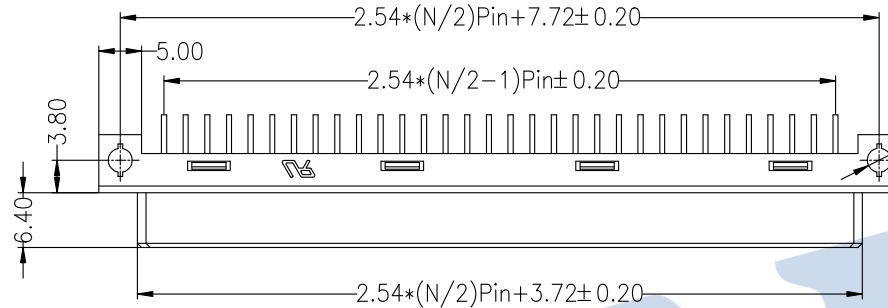

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

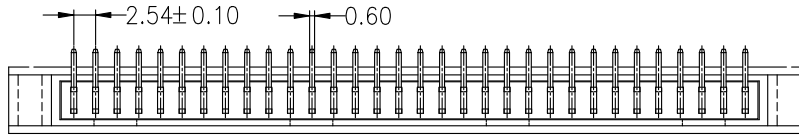

Ordering Information

35112 XX B F R XX BNAX

No. of Pins NPin N=10、16、20、 32、44、48、64	Contact Type F=Female	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
---	--------------------------	---	-------------

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT
				DIM	TOL					
B	2014.09.16	增加UL标识		X.X	±0.30	CHECK			UNIT	mm
A0	2014.04.11	NEW DRAWING		X.XX	±0.20					
				X.XXX	±0.10					
				Angle	±3°	APPROVE			SHEET	1/1
				DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 35112XXBFRXXBNAX
 TITLE: 欧式插座 母座 90度 2xNP 成品系列图