

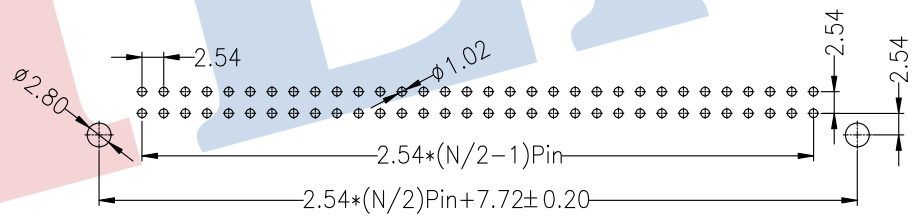
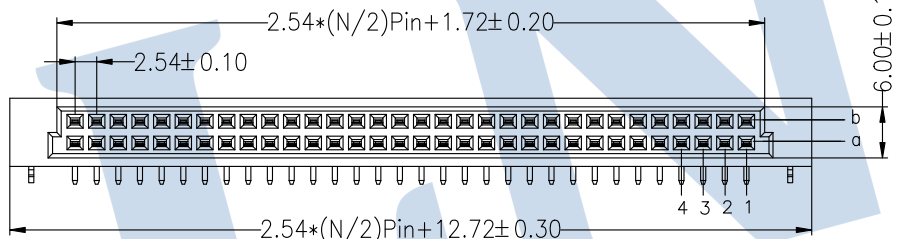



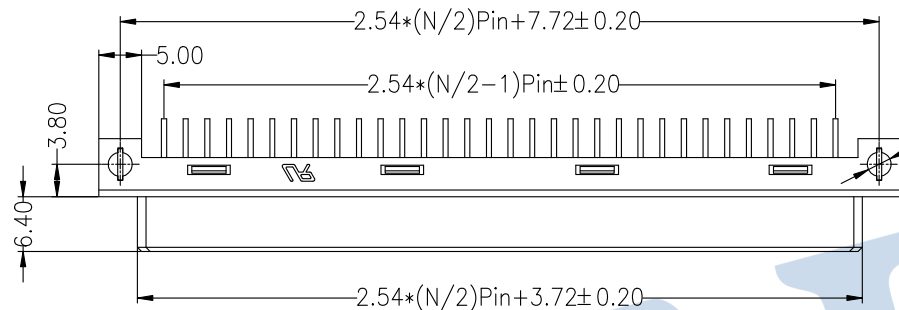

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

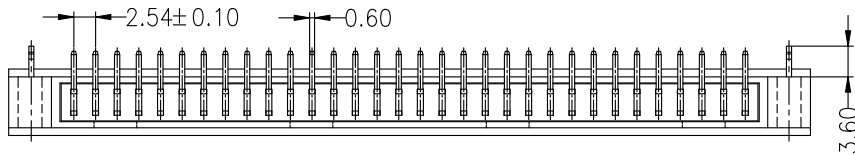

Ordering Information

35112 XX B F R XX B WAX

No. of Pins
 NPin
 N=10、16、20、
 32、44、48、64

Contact Type
 F=Female

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin

Stream Code

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT	深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30							
B	2014.09.16	增加UL标识		X.XX	±0.20	APPROVE			SIZE	A4	PART NO.	35112XXBFRXXBWAX
A0	2014.04.11	NEW DRAWING		X.XXX	±0.10							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			SHEET	1/1	TITLE:	欧式插座 母座 90度 2xNP 带鱼叉成品系列图
				DIM	TOL							