

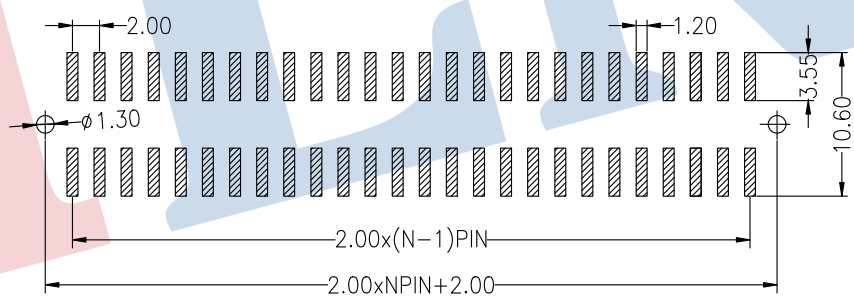

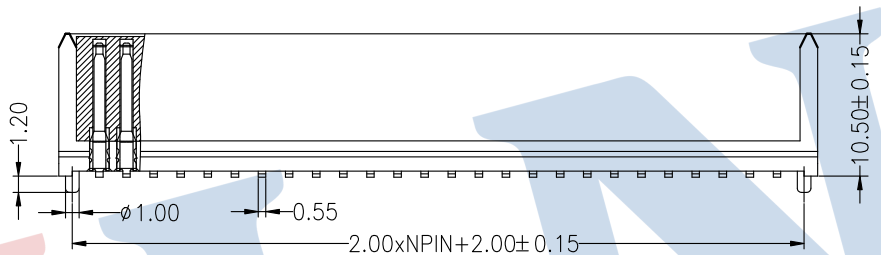


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C±5°C, 10s(PA9T insulator)

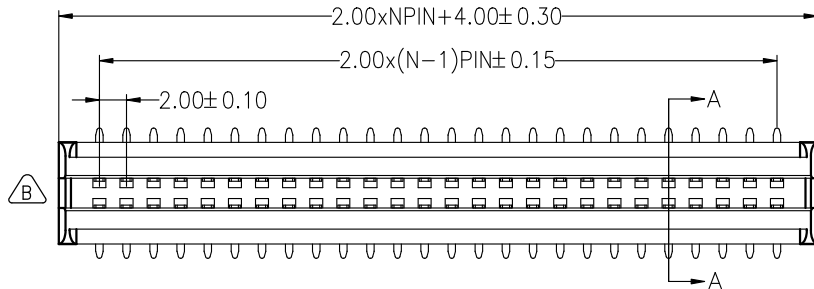

A-A SECTION

Recommended P.C.B Layout

Ordering Information
4410-2 XX M XX F E B W 0X

- | | |
|-------------|-----------------|
| No. of Pins | Contact Plating |
| 2X13P | G0:Gold Flash |
| 2X15P | G1:1U" Gold |
| 2X16P | G2:2U" Gold |
| 2X20P | G3:3U" Gold |
| 2X23P | G4:5U" Gold |
| 2X27P | G5:10U" Gold |
| 2X32P | |

				OPERATION		DRAW	RICH LIN	23.03.07	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
B	2020.03.20	两边加缺口		X.XX	±0.20	CHECK			SIZE	A4	PART NO.	4410-2XXMXXFEBW0X
A	2023.03.07	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	TITLE:	2.0加强型金手指连接器 母座 2xNpin H10.5 SMT 带柱
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.	UNIT		