HSF RoHS

FILE NO :E362810

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V−0)

Resistance To Soldering Heat:

Resistance To Soldering Heat:

245° C±5° C, 10s(PBT insulator)

260° C±5° C, 10s(PA6T&PA9T insulator)

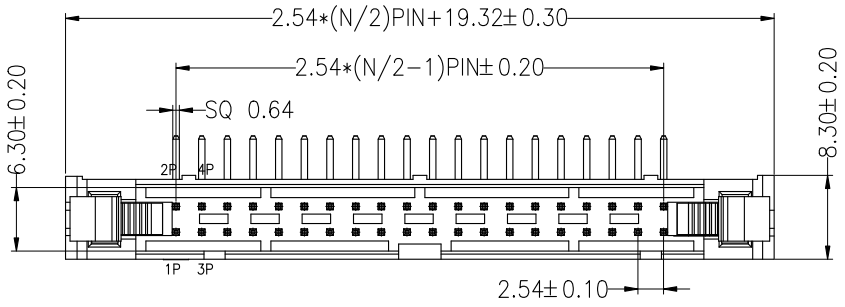

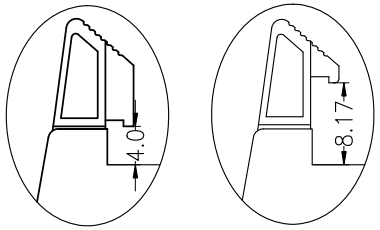

S=Short Latch L=Long Latch

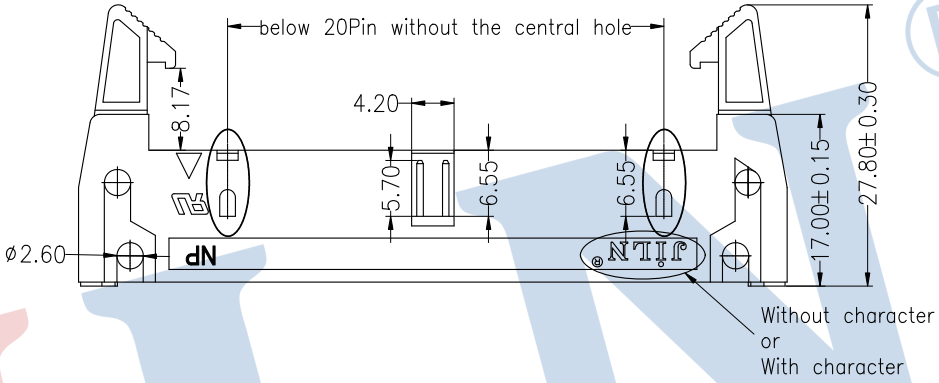



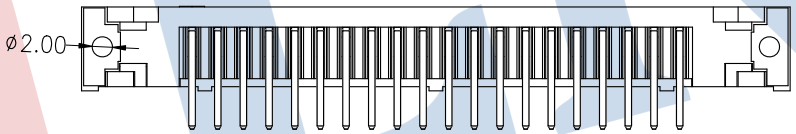

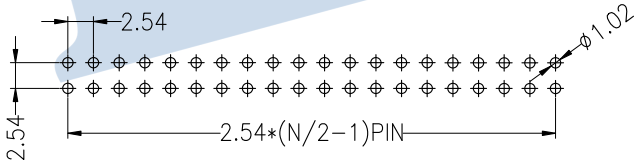

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

3310 XX R XX X X X X XX

- No.of Pins NPin N=6−64
- Contact Plating
  - G0:Gold Flash
  - G1:1u" Gold
  - G2:1.5u" Gold
  - G3:2u" Gold
  - G4:3u" Gold
  - G5:5u" Gold
  - G6:10u" Gold
  - G7:15u" Gold
  - G8:30u" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- Insulator Material Option
  - A=BK−PBT
  - C=BK−PA6T
  - E=BK−PA9T
- Color Type
  - B=Black
  - G=Grey
- Latch Type
  - L=Long Latch
  - S=Short Latch
- Packing
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap
- Code Stream 01~99

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023.03.13	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Jelly Feng	2023.03.13
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-27483253 Fax：86-755-2997-5588

PART NO.	3310XXRXXXBXXXX
TITLE:	2.54 ejector header Npin 90°