

HSF RoHS

SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:20mΩ Max

Dielectric Strength:Min 1000V AC RMS

Operation Temperature:-40℃ to +105℃

Contact Material:Copper Alloy



Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)


Standard: PPS

Soldering Temperature:

260℃±5℃ For 5~10 Second

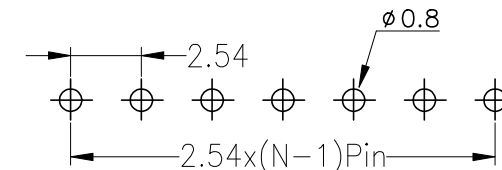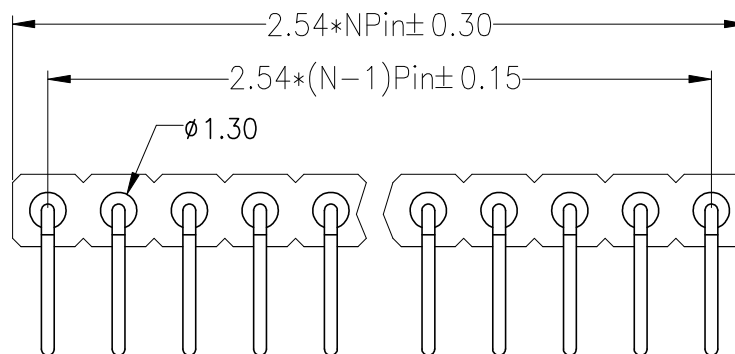

PCB LAYOUT

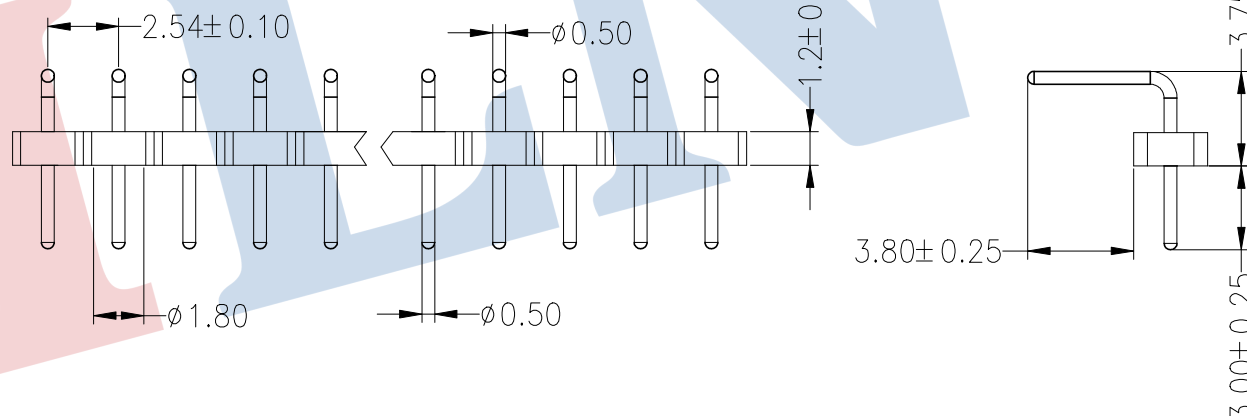

Ordering Information

3610 12 1 XX R XX 114 XX

No. of Pins
NPIN
N=02~40

Contact Plating
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
S0:Gold Flash/Tin
SN:Tin

Length
114=11.4mm

Code Stream

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

CHECK

APPROVE

DRAW Jelly Feng

2023.07.11

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.

3610121XXRXX114XX

TITLE:

2.54X1.2单排双头针90° L11.4

1 2 3 4 5 6 7 8 9